


Reference Chart: Albuz AVI "Bubble Jet" (Air Injected) Nozzles

ALBUZ AVI nozzles : the Venturi revolution

- By adding air **A** to the spray droplet and doubling the droplet size, ALBUZ® AVI eliminates drift and improves coverage.
- AVI spray nozzles mix the liquid and air **B** to produce large drops filled with bubbles. The air bubbles cause the drops to explode when they hit the target.
- Large drops become small droplets providing optimum coverage for chemical efficacy.



Example speed range of a tip
4 GPA @ 30 – 105 psi







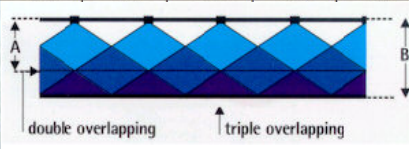
Speed Range
w/auto rate controller
15" spacing 15 to 30 mph
20" spacing 12 to 25 mph

SPEED IN MILES PER HOUR





30" Nozzle Spacing		2.7	3.3	4	4.6	5.3	6	6.6	8	9.3	10	12	16.7		
20" Nozzle Spacing		US	4	5	6	7	8	9	10	12	14	16	18	20	
15" Nozzle Spacing		PSI	GPM	5	6.3	7.5	8.8	10	11.3	12.5	15	17.5	20	22.5	25
Albuz ISO – GREEN AVI – 110-015 Use in Lou of Albuz APS 110-015 Yellow	15	0.09	6.7	5.3	4.5	3.8	3.3	3.0	2.7	2.2	1.9	1.7	1.5	1.3	
	20	0.11	8.2	6.5	5.4	4.7	4.1	3.6	3.3	2.7	2.3	2.0	1.8	1.6	
	30	0.13	9.7	7.7	6.4	5.5	4.8	4.3	3.9	3.2	2.8	2.4	2.1	1.9	
	40	0.15	11.1	8.9	7.4	6.4	5.6	5.0	4.5	3.7	3.2	2.8	2.5	2.2	
	50	0.17	12.6	10.1	8.4	7.2	6.3	5.6	5.0	4.2	3.6	3.2	2.8	2.5	
	60	0.18	13.4	10.7	8.9	7.6	6.7	5.9	5.3	4.5	3.8	3.3	3.0	2.7	
Albuz ISO – GREEN	75	0.21	15.6	12.5	10.4	8.9	7.8	6.9	6.2	5.2	4.5	3.9	3.5	3.1	
	90	0.23	17.1	13.7	11.4	9.8	8.5	7.6	6.8	5.7	4.9	4.3	3.8	3.4	
	Albuz ISO – YELLOW AVI – 110-02 Use in Lou of Albuz APS 110-02 Orange	15	0.12	8.9	7.1	5.9	5.1	4.5	4.0	3.6	3.0	2.5	2.2	2.0	1.8
		20	0.14	10.4	8.3	6.9	5.9	5.2	4.6	4.2	3.5	3.0	2.6	2.3	2.1
		30	0.17	12.6	10.1	8.4	7.2	6.3	5.6	5.0	4.2	3.6	3.2	2.8	2.5
		40	0.20	14.9	11.9	9.9	8.5	7.4	6.6	5.9	5.0	4.2	3.7	3.3	3.0
50		0.22	16.3	13.1	10.9	9.3	8.2	7.3	6.5	5.4	4.7	4.1	3.6	3.3	
60		0.24	17.8	14.3	11.9	10.2	8.9	7.9	7.1	5.9	5.1	4.5	4.0	3.6	
Albuz ISO – YELLOW	75	0.27	20	16.0	13.4	11.5	10.0	8.9	8.0	6.7	5.7	5.0	4.5	4.0	
	90	0.30	22	17.8	14.9	12.7	11.1	9.9	8.9	7.4	6.4	5.6	5.0	4.5	
	Albuz ISO – PINK AVI – 110-025	30	0.22	16.3	13.1	10.9	9.3	8.2	7.3	6.5	5.4	4.7	4.1	3.6	3.3
		40	0.25	18.6	14.9	12.4	10.6	9.3	8.3	7.4	6.2	5.3	4.6	4.1	3.7
		50	0.28	21	16.6	13.9	11.9	10.4	9.2	8.3	6.9	5.9	5.2	4.6	4.2
		60	0.31	23	18.4	15.3	13.2	11.5	10.2	9.2	7.7	6.6	5.8	5.1	4.6
75		0.34	25	20	16.8	14.4	12.6	11.2	10.1	8.4	7.2	6.3	5.6	5.0	
90		0.38	28	23	18.8	16.1	14.1	12.5	11.3	9.4	8.1	7.1	6.3	5.6	
Albuz ISO – BLUE AVI – 110-03 Use in Lou of Albuz APS 110-03 Red	15	0.18	13.4	10.7	8.9	7.6	6.7	5.9	5.3	4.5	3.8	3.3	3.0	2.7	
	20	0.21	15.6	12.5	10.4	8.9	7.8	6.9	6.2	5.2	4.5	3.9	3.5	3.1	
	30	0.26	19.3	15.4	12.9	11.0	9.7	8.6	7.7	6.4	5.5	4.8	4.3	3.9	
	40	0.30	22	17.8	14.9	12.7	11.1	9.9	8.9	7.4	6.4	5.6	5.0	4.5	
	50	0.34	25	20	16.8	14.4	12.6	11.2	10.1	8.4	7.2	6.3	5.6	5.0	
	60	0.37	27	22	18.3	15.7	13.7	12.2	11.0	9.2	7.8	6.9	6.1	5.5	
Albuz ISO – BLUE	75	0.41	30	24	20	17.4	15.2	13.5	12.2	10.1	8.7	7.6	6.8	6.1	
	90	0.45	33	27	22	19.1	16.7	14.9	13.4	11.1	9.5	8.4	7.4	6.7	
	Albuz ISO – RED AVI – 110-04 Use in Lou of Albuz APS 110-04 Green	15	0.24	17.8	14.3	11.9	10.2	8.9	7.9	7.1	5.9	5.1	4.5	4.0	3.6
		20	0.28	21	16.6	13.9	11.9	10.4	9.2	8.3	6.9	5.9	5.2	4.6	4.2
		30	0.35	26	21	17.3	14.9	13.0	11.6	10.4	8.7	7.4	6.5	5.8	5.2
		40	0.40	30	24	19.8	17.0	14.9	13.2	11.9	9.9	8.5	7.4	6.6	5.9
50		0.45	33	27	22	19.1	16.7	14.9	13.4	11.1	9.5	8.4	7.4	6.7	
60		0.49	36	29	24	21	18.2	16.2	14.6	12.1	10.4	9.1	8.1	7.3	
Albuz ISO – RED	75	0.55	41	33	27	23	20	18.2	16.3	13.6	11.7	10.2	9.1	8.2	
	90	0.60	45	36	30	25	22	19.8	17.8	14.9	12.7	11.1	9.9	8.9	
	Albuz ISO – BROWN AVI – 110-05 Use in Lou of Albuz APS 110-05 Torquoise	15	0.31	23	18.4	15.3	13.2	11.5	10.2	9.2	7.7	6.6	5.8	5.1	4.6
		20	0.35	26	21	17.3	14.9	13.0	11.6	10.4	8.7	7.4	6.5	5.8	5.2
		30	0.43	32	26	21	18.2	16.0	14.2	12.8	10.6	9.1	8.0	7.1	6.4
		40	0.50	37	30	25	21	18.6	16.5	14.9	12.4	10.6	9.3	8.3	7.4
50		0.56	42	33	28	24	21	18.5	16.6	13.9	11.9	10.4	9.2	8.3	
60		0.61	45	36	30	26	23	20	18.1	15.1	12.9	11.3	10.1	9.1	
Albuz ISO – BROWN	75	0.68	50	40	34	29	25	22	20	16.8	14.4	12.6	11.2	10.1	
	90	0.75	56	45	37	32	28	25	22	18.6	15.9	13.9	12.4	11.1	
	Albuz ISO – GREY AVI – 110-06 Use in Lou of Albuz APS 110-06 Blue	15	0.37	27	22	18.3	15.7	13.7	12.2	11.0	9.2	7.8	6.9	6.1	5.5
		20	0.42	31	25	21	17.8	15.6	13.9	12.5	10.4	8.9	7.8	6.9	6.2
		30	0.52	39	31	26	22	19.3	17.2	15.4	12.9	11.0	9.7	8.6	7.7
		40	0.60	45	36	30	25	22	19.8	17.8	14.9	12.7	11.1	9.9	8.9
50		0.67	50	40	33	28	25	22	19.9	16.6	14.2	12.4	11.1	9.9	
60		0.73	54	43	36	31	27	24	22	18.1	15.5	13.6	12.0	10.8	
Albuz ISO – GREY	75	0.82	61	49	41	35	30	27	24	20	17.4	15.2	13.5	12.2	
	90	0.90	67	53	45	38	33	30	27	22	19.1	16.7	14.9	13.4	

<p style="text-align: center;">CANADIAN ALBUZ DISTRIBUTOR BOOMSPRAY CANADA INC. Spirit River, AB, Canada. TOH-3GO Visit our web site @ www.boomspraycanada.com Ph: 780-864-3735 Fax: 864-3468 or 1-800-661-7401</p>	<p>BOOM HEIGHT</p> <p>Minimum height above target for double overlap with AXI 110</p> <p>Minimum height above target for double overlap with AXI 80</p>	<p>SPACING</p> <p>15" 20" 30"</p> <p>10" 15" 20"</p> <p>20" 25" 35"</p>	<p>Dealer</p>
--	--	--	----------------------

Reference Chart: Albuz ADI Anti-Drift Nozzles

ADI Anti – Drift nozzles			SPEED IN MILES PER HOUR													
30" Nozzle Spacing			2.7	3.3	4	4.6	5.3	6	6.6	8	9.3	10	12	16.7		
20" Nozzle Spacing			US	4	5	6	7	8	9	10	12	14	16	18	20	
15" Nozzle Spacing			PSI	GPM	5	6.3	7.5	8.8	10	11.3	12.5	15	17.5	20	22.5	25
Albuz ISO – ORANGE ADI – 110 - 01 Use in Lou of Albuz APS 110 – 01 Brown	15	0.061	4.5	3.6	3.0	2.6	2.3	2.0	1.8	1.5	1.3	1.1	1.0	0.91		
	20	0.071	5.3	4.2	3.5	3.0	2.6	2.3	2.1	1.8	1.5	1.3	1.2	1.1		
	30	0.087	6.5	5.2	4.3	3.7	3.2	2.9	2.6	2.2	1.8	1.6	1.4	1.3		
	40	0.10	7.4	5.9	5.0	4.2	3.7	3.3	3.0	2.5	2.1	1.9	1.7	1.5		
	50	0.11	8.2	6.5	5.4	4.7	4.1	3.6	3.3	2.7	2.3	2.0	1.8	1.6		
	60	0.12	8.9	7.1	5.9	5.1	4.5	4.0	3.6	3.0	3.5	2.2	2.0	1.8		
	90	0.15	11.1	8.9	7.4	6.4	5.6	5.0	4.5	3.7	3.2	2.8	2.5	2.2		
Albuz ISO – GREEN ADI – 110-015 Use in Lou of Albuz APS 110–015 Yellow	15	0.09	6.7	5.3	4.5	3.8	3.3	3.0	2.7	2.2	1.9	1.7	1.5	1.3		
	20	0.11	8.2	6.5	5.4	4.7	4.1	3.6	3.3	2.7	2.3	2.0	1.8	1.6		
	30	0.13	9.7	7.7	6.4	5.5	4.8	4.3	3.9	3.2	2.8	2.4	2.1	1.9		
	40	0.15	11.1	8.9	7.4	6.4	5.6	5.0	4.5	3.7	3.2	2.8	2.5	2.2		
	50	0.17	12.6	10.1	8.4	7.2	6.3	5.6	5.0	4.2	3.6	3.2	2.8	2.5		
	60	0.18	13.4	10.7	8.9	7.6	6.7	5.9	5.3	4.5	3.8	3.3	3.0	2.7		
	90	0.23	17.1	13.7	11.4	9.8	8.5	7.6	6.8	5.7	4.9	4.3	3.8	3.4		
Albuz ISO – YELLOW ADI – 110-02 Use in Lou of Albuz APS 110 –02 Orange	15	0.12	8.9	7.1	5.9	5.1	4.5	4.0	3.6	3.0	2.5	2.2	2.0	1.8		
	20	0.14	10.4	8.3	6.9	5.9	5.2	4.6	4.2	3.5	3.0	2.6	2.3	2.1		
	30	0.17	12.6	10.1	8.4	7.2	6.3	5.6	5.0	4.2	3.6	3.2	2.8	2.5		
	40	0.20	14.9	11.9	9.9	8.5	7.4	6.6	5.9	5.0	4.2	3.7	3.3	3.0		
	50	0.22	16.3	13.1	10.9	9.3	8.2	7.3	6.5	5.4	4.7	4.1	3.6	3.3		
	60	0.24	17.8	14.3	11.9	10.2	8.9	7.9	7.1	5.9	5.1	4.5	4.0	3.6		
	90	0.30	22	17.8	14.9	12.7	11.1	9.9	8.9	7.4	6.4	5.6	5.0	4.5		
THE ALBUZ CERAMIC ADI 110 Flat Fan Anti – Drift SPRAY NOZZLE													Recommended PRESSURE 30 to 60 P.S.I.		Example speed range of a tip 4 GPA @ 30 – 60 psi Speed Range w/auto rate controller 15" spacing 15 to 22.5 mph 20" spacing 12 to 18 mph	
Albuz ISO – BLUE ADI – 110-03 Use in Lou of Albuz APS 110 –03 Red	15	0.18	13.4	10.7	8.9	7.6	6.7	5.9	5.3	4.5	3.8	3.3	3.0	2.7		
	20	0.21	15.6	12.5	10.4	8.9	7.8	6.9	6.2	5.2	4.5	3.9	3.5	3.1		
	30	0.26	19.3	15.4	12.9	11.0	9.7	8.6	7.7	6.4	5.5	4.8	4.3	3.9		
	40	0.30	22	17.8	14.9	12.7	11.1	9.9	8.9	7.4	6.4	5.6	5.0	4.5		
	50	0.34	25	20	16.8	14.4	12.6	11.2	10.1	8.4	7.2	6.3	5.6	5.0		
	60	0.37	27	22	18.3	15.7	13.7	12.2	11.0	9.2	7.8	6.9	6.1	5.5		
	90	0.45	33	27	22	19.1	16.7	14.9	13.4	11.1	9.5	8.4	7.4	6.7		
Albuz ISO – RED ADI – 110-04 Use in Lou of Albuz APS 110 –04 Green	15	0.24	17.8	14.3	11.9	10.2	8.9	7.9	7.1	5.9	5.1	4.5	4.0	3.6		
	20	0.28	21	16.6	13.9	11.9	10.4	9.2	8.3	6.9	5.9	5.2	4.6	4.2		
	30	0.35	26	21	17.3	14.9	13.0	11.6	10.4	8.7	7.4	6.5	5.8	5.2		
	40	0.40	30	24	19.8	17.0	14.9	13.2	11.9	9.9	8.5	7.4	6.6	5.9		
	50	0.45	33	27	22	19.1	16.7	14.9	13.4	11.1	9.5	8.4	7.4	6.7		
	60	0.49	36	29	24	21	18.2	16.2	14.6	12.1	10.4	9.1	8.1	7.3		
	90	0.55	41	33	27	23	20	18.2	16.3	13.6	11.7	10.2	9.1	8.2		
Albuz ISO – BROWN ADI – 110-05 Use in Lou of Albuz APS 110-05 Torquoise	15	0.31	23	18.4	15.3	13.2	11.5	10.2	9.2	7.7	6.6	5.8	5.1	4.6		
	20	0.35	26	21	17.3	14.9	13.0	11.6	10.4	8.7	7.4	6.5	5.8	5.2		
	30	0.43	32	26	21	18.2	16.0	14.2	12.8	10.6	9.1	8.0	7.1	6.4		
	40	0.50	37	30	25	21	18.6	16.5	14.9	12.4	10.6	9.3	8.3	7.4		
	50	0.56	42	33	28	24	21	18.5	16.6	13.9	11.9	10.4	9.2	8.3		
	60	0.61	45	36	30	26	23	20	18.1	15.1	12.9	11.3	10.1	9.1		
	90	0.75	56	45	37	32	28	25	22	18.6	15.9	13.9	12.4	11.1		
ADI Drift reduction nozzle, reduces small droplets by 50% . Pink Ceramic insert orifice gives excellent precision and high wear resistance Fits all Spray systems body holders			easy to dismantle and clean													
CANADIAN ALBUZ DISTRIBUTOR BOOMSPRAY CANADA INC. Spirit River, AB, Canada. TOH-3GO Visit our web site @ www.boomspraycanada.com Ph: 780-864-3735 Fax: 864-3468 or 1-800-661-7401			BOOM HEIGHT Minimum height above target for double overlap with AXI 110			SPACING 15" 20" 30" 10" 15" 20" 20" 25" 35"			Dealer							

Reference Chart: Albus AXI Extended Range Nozzles

AXI Extended Range tips			SPEED IN MILES PER HOUR													
30" Nozzle Spacing			2.7	3.3	4	4.6	5.3	6	6.6	8	9.3	10	12	16.7		
20" Nozzle Spacing			US													
15" Nozzle Spacing			PSI	GPM	5	6.3	7.5	8.8	10	11.3	12.5	15	17.5	20	22.5	25
Albus ISO – ORANGE AXI – 110-01 Replaces Albus APS 110 – 01 Brown	15	0.061	4.5	3.6	3.0	2.6	2.3	2.0	1.8	1.5	1.3	1.1	1.0	0.91		
	20	0.071	5.3	4.2	3.5	3.0	2.6	2.3	2.1	1.8	1.5	1.3	1.2	1.1		
	30	0.087	6.5	5.2	4.3	3.7	3.2	2.9	2.6	2.2	1.8	1.6	1.4	1.3		
	40	0.10	7.4	5.9	5.0	4.2	3.7	3.3	3.0	2.5	2.1	1.9	1.7	1.5		
	50	0.11	8.2	6.5	5.4	4.7	4.1	3.6	3.3	2.7	2.3	2.0	1.8	1.6		
	60	0.12	8.9	7.1	5.9	5.1	4.5	4.0	3.6	3.0	3.5	2.2	2.0	1.8		
	90	0.15	11.1	8.9	7.4	6.4	5.6	5.0	4.5	3.7	3.2	2.8	2.5	2.2		
Albus ISO – GREEN AXI – 110-015 Replaces Albus APS 110-015 Yellow	15	0.09	6.7	5.3	4.5	3.8	3.3	3.0	2.7	2.2	1.9	1.7	1.5	1.3		
	20	0.11	8.2	6.5	5.4	4.7	4.1	3.6	3.3	2.7	2.3	2.0	1.8	1.6		
	30	0.13	9.7	7.7	6.4	5.5	4.8	4.3	3.9	3.2	2.8	2.4	2.1	1.9		
	40	0.15	11.1	8.9	7.4	6.4	5.6	5.0	4.5	3.7	3.2	2.8	2.5	2.2		
	50	0.17	12.6	10.1	8.4	7.2	6.3	5.6	5.0	4.2	3.6	3.2	2.8	2.5		
	60	0.18	13.4	10.7	8.9	7.6	6.7	5.9	5.3	4.5	3.8	3.3	3.0	2.7		
	90	0.23	17.1	13.7	11.4	9.8	8.5	7.6	6.8	5.7	4.9	4.3	3.8	3.4		
Albus ISO – YELLOW AXI – 110-02 Replaces Albus APS 110-02 Orange	15	0.12	8.9	7.1	5.9	5.1	4.5	4.0	3.6	3.0	2.5	2.2	2.0	1.8		
	20	0.14	10.4	8.3	6.9	5.9	5.2	4.6	4.2	3.5	3.0	2.6	2.3	2.1		
	30	0.17	12.6	10.1	8.4	7.2	6.3	5.6	5.0	4.2	3.6	3.2	2.8	2.5		
	40	0.20	14.9	11.9	9.9	8.5	7.4	6.6	5.9	5.0	4.2	3.7	3.3	3.0		
	50	0.22	16.3	13.1	10.9	9.3	8.2	7.3	6.5	5.4	4.7	4.1	3.6	3.3		
	60	0.24	17.8	14.3	11.9	10.2	8.9	7.9	7.1	5.9	5.1	4.5	4.0	3.6		
	90	0.30	22	17.8	14.9	12.7	11.1	9.9	8.9	7.4	6.4	5.6	5.0	4.5		
THE ALBUS CERAMIC AXI 110 FLAT FAN EXTENDED RANGE SPRAY NOZZLE											Recommended PRESSURE 15 to 60 P.S.I.		Example speed range of a tip 4 GPA @ 15 – 60 psi Speed Range w/auto rate controller 15" spacing 11.3 to 22.5 mph 20" spacing 9 to 18 mph			
Albus ISO – BLUE AXI – 110-03 Replaces Albus APS 110-03 Red	15	0.18	13.4	10.7	8.9	7.6	6.7	5.9	5.3	4.5	3.8	3.3	3.0	2.7		
	20	0.21	15.6	12.5	10.4	8.9	7.8	6.9	6.2	5.2	4.5	3.9	3.5	3.1		
	30	0.26	19.3	15.4	12.9	11.0	9.7	8.6	7.7	6.4	5.5	4.8	4.3	3.9		
	40	0.30	22	17.8	14.9	12.7	11.1	9.9	8.9	7.4	6.4	5.6	5.0	4.5		
	50	0.34	25	20	16.8	14.4	12.6	11.2	10.1	8.4	7.2	6.3	5.6	5.0		
	60	0.37	27	22	18.3	15.7	13.7	12.2	11.0	9.2	7.8	6.9	6.1	5.5		
	90	0.45	33	27	22	19.1	16.7	14.9	13.4	11.1	9.5	8.4	7.4	6.7		
Albus ISO – RED AXI – 110-04 Replaces Albus APS 110-04 Green	15	0.24	17.8	14.3	11.9	10.2	8.9	7.9	7.1	5.9	5.1	4.5	4.0	3.6		
	20	0.28	21	16.6	13.9	11.9	10.4	9.2	8.3	6.9	5.9	5.2	4.6	4.2		
	30	0.35	26	21	17.3	14.9	13.0	11.6	10.4	8.7	7.4	6.5	5.8	5.2		
	40	0.40	30	24	19.8	17.0	14.9	13.2	11.9	9.9	8.5	7.4	6.6	5.9		
	50	0.45	33	27	22	19.1	16.7	14.9	13.4	11.1	9.5	8.4	7.4	6.7		
	60	0.49	36	29	24	21	18.2	16.2	14.6	12.1	10.4	9.1	8.1	7.3		
	90	0.60	45	36	30	25	22	19.8	17.8	14.9	12.7	11.1	9.9	8.9		
Albus ISO – BROWN AXI – 110-05 Replaces Albus APS 110-05 Torquoise	15	0.31	23	18.4	15.3	13.2	11.5	10.2	9.2	7.7	6.6	5.8	5.1	4.6		
	20	0.35	26	21	17.3	14.9	13.0	11.6	10.4	8.7	7.4	6.5	5.8	5.2		
	30	0.43	32	26	21	18.2	16.0	14.2	12.8	10.6	9.1	8.0	7.1	6.4		
	40	0.50	37	30	25	21	18.6	16.5	14.9	12.4	10.6	9.3	8.3	7.4		
	50	0.56	42	33	28	24	21	18.5	16.6	13.9	11.9	10.4	9.2	8.3		
	60	0.61	45	36	30	26	23	20	18.1	15.1	12.9	11.3	10.1	9.1		
	90	0.75	56	45	37	32	28	25	22	18.6	15.9	13.9	12.4	11.1		
Albus ISO – GREY AXI – 110-06 Replaces Albus APS 110-06 Blue	15	0.37	27	22	18.3	15.7	13.7	12.2	11.0	9.2	7.8	6.9	6.1	5.5		
	20	0.42	31	25	21	17.8	15.6	13.9	12.5	10.4	8.9	7.8	6.9	6.2		
	30	0.52	39	31	26	22	19.3	17.2	15.4	12.9	11.0	9.7	8.6	7.7		
	40	0.60	45	36	30	25	22	19.8	17.8	14.9	12.7	11.1	9.9	8.9		
	50	0.67	50	40	33	28	25	22	19.9	16.6	14.2	12.4	11.1	9.9		
	60	0.73	54	43	36	31	27	24	22	18.1	15.5	13.6	12.0	10.8		
	90	0.82	61	49	41	35	30	27	24	20	17.4	15.2	13.5	12.2		

CANADIAN ALBUS DISTRIBUTOR
BOOMSPRAY CANADA INC.
 Spirit River, AB, Canada. TOH-3GO
 Visit our web site @ www.boomspraycanada.com
 Ph: 780-864-3735 Fax: 864-3468 or 1-800-661-7401

BOOM HEIGHT	SPACING	Dealer
Minimum height above target	15" 20" 30"	
for double overlap with AXI 110	10" 15" 20"	
Minimum height above target		
for double overlap with AXI 80	20" 25" 35"	